

The trusted french solutions

Identity · Biometry · Blockchain



Biometry

FAP60 LFD Jenetric
Iris camera Optional

Multi-interface

Smart card reader 5G, WiFi, NFC, BT

For any device

Smartphone Tablet Computer

Universal.
Wireless
Secure.







What is GripID?




The innovation brought by **GripID** is to externalize professional identification and authentication features in a tiny and secure 4G device.

The **GripID** embeds a wide range of custom interfaces such as professional fingerprint scanner, contact and contactless smart cards reader, document recognition with OCR as well as MRZ stripes.

Thanks to its patented pairing technology, the connexion with a smartphone, tablet or computer is simple and secure. **GripID** shares its interfaces or its embedded applications with any device running any operating system: Linux, Windows, MacOS, iOS, Android etc.



GripID comes with its own **Enterprise Mobility Management** system. The **EMM** allows to **manage** a **large fleet of devices**, securing applications, pushing updates or locating units is easy and fast.

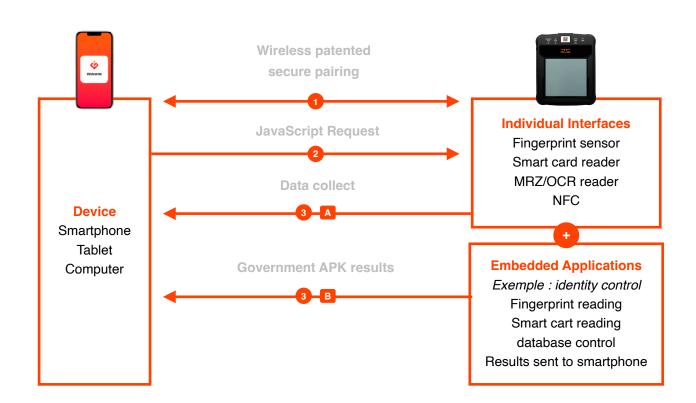

Universal pairing. Fast & simple.



An innovative patented technology.

No password management, no endless network lists and no training.





Step 1 : WiFi access

Switch on the GripID and select pairing. Scan the QR Code displayed on GripID with smartphone, or any device, to initiate pairing process.

GripID is waiting for connection request



Step 3 : Complete pairing

A web page pops-up on the smartphone with a unique QR Code. Scan it with the GripID camera to complete the pairing.

GripID is paired with the smartphone



Step 4: Ready to use.

The GripID is now paired with the smartphone and ready. All the functions are accessible through the SSL web page menu.

GripID is ready to use with the smartphone

Specifications



Fingerprint Sensor Jenetric FAP60 LFD

SmartCard Reader ID1 Format / ISO7816

Iris Recognition (optional)
Infrared iris camera

Connectivity 5G, NFC, WiFi, BT

Battery life 12 to 20 hours Weight 260g

Size 145x125x24mm

